

HENDERSON WHEEL & WAREHOUSE SUPPLY

2009 CUSTOM WHEEL & ACCESSORY CATALOG

November 2009

Featuring:

Custom Wheel Applications

Pages 2 - 11

Alcoa Light Truck Wheels & Parts

Pages 12 - 26

Custom Wheel Caps

Pages 27 - 29

Custom Wheel Nuts

Pages 30 - 31

Conversion Studs

Pages 32

Custom Wheel Part Numbers and Caps

Pages 33

Alcoa Chemicals

Pages 34



CUSTOM WHEEL APPLICATIONS WHITE SPOKE

For caps, see Page 33.

For lug nuts, use acorn nuts
on Page 30.

For maximum load ratings,
see inside back cover.



BOLT CIRCLE	4-4"	5-4.5"	5-5"	5-5.5"	6-5.5"	8-6.5"
12" x 4" Trailer Use Only	23983	23969				
13" x 4.5" Trailer Use Only	80-3314T	80-3324T				
14" x 6" Trailer Use Only		80-4326T-E				
14" x 6" Automotive Use					80-4366	
15" x 6" Trailer Use Only		80-5326T-E			80-5366T-E	
15" x 7" Automotive Use		80-5327	80-5347	80-5357	80-5367	80-5387 (No Disc)
15" x 8" Automotive Use				80-5358		
16" x 6" Trailer Use Only						80-6386T-E
16" x 7" Automotive Use					80-6367	80-6387



CUSTOM WHEEL APPLICATIONS
CHROME SPOKE

For caps, see Page 33.

For lug nuts, use acorn nuts
on Page 30.

For maximum load ratings,
see inside back cover.



BOLT CIRCLE	6-5.5"
15" x 6" Trailer Use Only	81-5366CT



CHROME MOD

For caps, see Page 33.

For lug nuts, use acorn nuts on Page 30.

For maximum load ratings, see inside back cover.



BOLT CIRCLE	5-4.5"	6-5.5"	8-6.5"
13" x 4.5" Trailer Use Only	19-2410CT		
14" x 6" Trailer Use Only	19-3410CT		
15" x 6" Trailer Use Only	19-4410CT	19-6410CT	
16" x 6" Trailer Use Only			19-8486CT



**CUSTOM WHEEL APPLICATIONS
WHITE MOD**

For caps, see Page 33.

For lug nuts, use acorn nuts
on Page 30.

For maximum load ratings,
see inside back cover.



BOLT CIRCLE	4-4"	5-4 1/2"	5-5"	6-5 1/2"	8-6 1/2"
12" x 4" Trailer Use Only	44163	44165			
13" x 4.5" Trailer Use Only		91-3412			
14" x 6" Trailer Use Only		91-4612-E			
15" x 5" Trailer Use Only		91-5512-E	91-5550-E		
15" x 6" Trailer Use Only		91-5612-E	91-5650-E	91-5660-E	
16" x 6" Trailer Use Only				KH128700	91-7680-E



CUSTOM WHEEL APPLICATIONS BLACK DAYTONA

For caps, see Page 33.

For lug nuts, use acorn nuts
on Page 30.

For maximum load ratings,
see inside back cover.



BOLT CIRCLE	5-4 1/2"	5-5 1/2"	6-5 1/2"
15" x 8" Automotive Use	5158012	5158055	5158060
15" x 10" Automotive Use	5150012		



**ALUMINUM TRAILER WHEEL APPLICATIONS
SERIES 03**



Part #	Size	Bolt Pattern	Center Hole	Offset	Capacity
0345545	14x5.5	5x4.5	3.19	0	1900
0356545	15x6	5x4.5	3.19	0	2150
0356655	15x6	6x5.5	4.25	0	2830
0367655	16x7	6x5.5	4.25	0	3200
0367865HD	16x7	8x6.5	4.90	-8mm	3960

**ALUMINUM TRAILER WHEEL APPLICATIONS
SERIES 04**



Part #	Size	Bolt Pattern	Center Hole	Offset	Capacity
0424440	12x4	4x4.0	2.80	0	1220
0424545	12x4	5x4.5	3.19	0	1520
0465440	13x5	4x4.0	2.80	0	1100
0435545	13x5	5x4.5	3.19	0	1660
0445545	14x5.5	5x4.5	3.19	0	1900
0455545	15x5	5x4.5	3.19	0	1820
0456545	15x6	5x4.5	3.19	0	2150
0456655	15x6	6x5.5	4.25	0	2830
0467655	16x7	6x5.5	4.25	+5mm	3200
0467865HD	16x7	8x6.5	4.90	-8mm	3960



**ALUMINUM TRAILER WHEEL APPLICATIONS
SERIES 05**


Part #	Size	Bolt Pattern	Center Hole	Offset	Capacity
0535440	13 x 5.5	4 x 4.0	2.80	0	1480
0535545	13 x 5.5	5 x 4.5	3.19	0	1660
0545545	14 x 5.5	5 x 4.5	3.19	0	1900
0556545	15 x 6	5 x 4.5	3.19	0	2150
0556655	15 x 6	6 x 5.5	4.25	0	2830
0567655	16 x 7	6 x 5.5	4.28	0	3200
0567865HD	16 x 7	8 x 6.5	4.90	0	3960

**ALUMINUM TRAILER WHEEL APPLICATIONS
SERIES 06**



Part #	Size	Bolt Pattern	Center Hole	Offset	Capacity
0635440	13x5	4x4.0	2.80	0	1480
0635545	13x5	5x4.5	3.19	0	1660
0645545	14x5.5	5x4.5	3.19	0	1900
0655545	15x5	5x4.5	3.19	0	1820
0656545	15x6	5x4.5	3.19	0	2150
0656655	15x6	6x5.5	4.25	0	2830
0667655	16x7	6x5.5	4.25	4.25	3200
0667865HD	16x7	8x6.5	4.90	0	3960



17" MOD SINGLE 8 HOLE WHEEL



The Alcoa 17" mod style classic single wheel for light trucks

PART NUMBER	SIZE	BOLT CIRCLE	CENTER BORE	MAXIMUM LOAD
478481	17x8	8x6.5	5.16	3450

16" ALCOA MOD STYLE CLASSIC SINGLE WHEELS



The Alcoa 16" mod style classic single wheel is an excellent custom wheel.

16" Wheel Specifications

SIZE	PART NUMBER	BOLT CIRCLE	MAXIMUM LOAD	CENTER BORE	CLOSED CAP	OPEN CAP	LONG CAP	LUG NUTS & COVERS
16 x 7 (Pickups & Trailers)	167041*	8 - 6 1/2"	3750	5.16"	003167***	008167***	002167*** (Closed Long Cap for Ford Rear)	See Below
*** Alcoa Aluminum cap. Closed caps have Alcoa medallion.								

LUG NUTS AND LUG NUT COVERS FOR ALCOA MOD STYLE SINGLE WHEELS (Except Hub Piloted Wheel)

PARTNUMBER	DESCRIPTION
000078	Chrome Lug Nut Cover
005716	7/16" Lug Nut
005120	1/2" Lug Nut
005916	9/16" Lug Nut
005012	M12 x 1.5 Lug Nut
005014	M14-1.5 Lug Nut



16" ALCOA LTS SINGLE WHEEL



The Alcoa 16" x 7" LTS single wheel is an excellent custom wheel. It will fit both Pickups and Trailers.

16 x 7 Wheel Specifications

PART NUMBER	BOLT CIRCLE	MAXIMUM LOAD	CENTER BORE	CLOSED CAP	OPEN CAP	LONG CAP	LUGNUTS & COVERS
167031 (Special Order)	8 - 6 1/2" (Check fit before mounting)	3415	5.16"	003167***	008167***	002167*** (Closed Long Cap for Ford Rear)	See Below
*** Alcoa Aluminum cap. Closed caps have Alcoa medallion.							

LUG NUTS AND LUG NUT COVERS FOR ALCOA LTS SINGLE WHEELS

PARTNUMBER	DESCRIPTION
000078	Chrome Lug Nut Cover
005716	7/16" Lug Nut
005120	1/2" Lug Nut
005916	9/16" Lug Nut
005012	M12 x 1.5 Lug Nut
005014	M14-1.5 Lug Nut

17.5" SINGLE ALCOA TRAILER WHEEL



Brilliant shine. Strong as an ox. Actually, strong enough to carry a stable of horses. This wheel weighs only 30 pounds but has a 6,050 pound maximum load rating.

17.5" x 6.75" Wheel Specifications

PART NUMBER	SIZE	BOLT CIRCLE	MAXIMUM LOAD	CENTER BORE
661401 Hub Piloted (Special Order)	17.5" x 6.75"	8 - 6 1/2"	6050	4.77"

LUG NUTS

PARTNUMBER	DESCRIPTION
039946	5/8" Swivel Lug Nut
000190	Chrome Lug Nut Cover



ALCOA MODSTYLE CLASSIC DUAL WHEELS
CHEVROLET & GMC 3500 2008-2009
8 Hole 6.5" Bolt Circle
4.60" Center Bore


17" X 6.5" Dual Wheel design to fit 2008-2009 Chevrolet 1 Ton Trucks. Uses two-piece washered nut. Uses steel inner wheel on dual. Each wheel has a maximum load capacity of 3200 pounds.

PART NUMBER	SIZE	DESCRIPTION
176411	17x6.5	Front Wheel
176412	17x6.5	Rear Wheel
Lug Nut 14mm-1.5	139698	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	003611	
Closed Rear Cap	003612	

ALCOA MOD STYLE CLASSIC DUAL WHEELS

CHEVROLET & GMC DUAL WHEELS 1988-2000

8 Hole 6.5" Bolt Circle

4.57" Center Bore



16" x 6" 8-Hole flat face dual wheel. Designed to fit 1988 - 2000 Chevrolet and GMC 1-ton two wheel drive and four wheel drive trucks. Uses two-piece washered nut. Uses steel inner wheel on dual.

Each wheel has a maximum load capacity of 2780 pounds.

235/16 tires will not work on this application. Check fit before mounting tire.

Description	Part No.	Other Information
16" Front Wheel (Special Order)	160231	Outside (Front) Polish
16" Rear Wheel (Special Order)	160232	Inside (Rear) Polish
Lug Nut 14mm-1.5	139698	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	003611*	
Closed Rear Cap	003612	

* Open 4WD caps not currently available.



ALCOA MODSTYLE CLASSIC DUAL WHEELS
DODGE 3500 DUAL WHEELS 2009-2008
8 Hole 6.5" Bolt Circle
4.77" Center Bore


17" Dual Wheel designed to fit 2008-2009 Dodge 1 Ton Trucks. Uses two-piece washered nut. Uses steel inner wheel on a dual. Each wheel has a maximum load capacity of 3200 pounds.

PART NUMBER	SIZE	DESCRIPTION
176401	17x6.5	Front Wheel
176402	17x6.5	Rear Wheel
9/16" Nut	139987	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	.
Closed Front Cap	003611	
Closed Rear Cap	003612	

ALCOA MOD STYLE CLASSIC DUAL WHEELS

DODGE DUAL WHEELS 1994-1999

Dodge Ram 3500 Trucks

Flat Face Wheel

8 Hole 6.5" Bolt Circle

4.77" Center Bore



16" x 6" 8-Hole flat face dual wheel. Designed to fit 1994 - 1999 Dodge 1-ton two wheel drive and four wheel drive trucks. Uses Two-Piece Washered Nut. Uses steel inner wheel on dual.

Each wheel has a maximum load capacity of 2440 pounds.

235/16 tires will not work on this application.

Check fit before mounting tire.

DESCRIPTION	PART NO.	OTHER INFORMATION
16" Front Wheel (Special Order)	160291	Outside (Front) Polish
16" Rear Wheel (Special Order)	160292	Inside (Rear) Polish
Lug Nut 9/16"	139987	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	001611	
Closed Rear Cap	001612	



ALCOA MODSTYLE CLASSIC DUAL WHEELS
FORD F350 DUAL WHEELS 2009-2008
8 Hole 200mm Bolt Circle
5.60" Center Bore


17" x 6" Dual Wheel Designed to fit 2008-2009 Ford 1 Ton Trucks. Uses two-piece washered nut. Uses steel inner wheel on a dual. Each wheel has a maximum load capacity of 3200 pounds.

PART NUMBER	SIZE	DESCRIPTION
176461	17x6.5	Front Wheel
176462	17x6.5	Rear Wheel
Lug Nut 14mm-1.5	139698	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	

ALCOA MOD STYLE CLASSIC DUAL WHEELS

FORD DUAL WHEELS 1984 - 1998

8 Hole 6.5" Bolt Circle

4.88" Center Bore



16" x 6" 8-Hole flat face dual wheel. These wheels fit Ford F350 1-ton 1984-1998 trucks. Uses Two-Piece Washered Nut. Uses steel inner wheel on dual.

Each wheel has a maximum load capacity of 2780 pounds.

Check fit before mounting tire.

DESCRIPTION	PART NO.	OTHER INFORMATION
16" 2WD Front Wheel except 235/16 Tire (84-98) (Special Order)	160241	Outside (Front) Polish
16" 2WD Rear Wheel except 235/16 Tire (84-98) (Special Order)	160242	Inside (Rear) Polish
16" 4WD Front Wheel (87 - 98) (Special Order)	160281	Outside (Front) Polish
16" 4WD Rear Wheel (87 - 98) (Special Order)	160282	Inside (Rear) Polish
Lug Nut 9/16"	139987	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	001611	
Closed Rear Cap	001612	



ALCOA MODSTYLE CLASSIC DUAL WHEELS

TWO WHEEL DRIVE FORD F-SUPER DUTY TRUCK 1987-1998

10 Hole 7.25" Bolt Circle

5.46" Center Bore



16" x 6" ten-hole flat face dual wheel. Designed to fit the two wheel drive 1987-1998 Ford F-Super Duty. Uses two-piece washered nut. Uses steel inner wheel on dual.

Each wheel has a maximum load capacity of 3050 pounds.

Check fit before mounting tire.

DESCRIPTION	PARTNO.	OTHER INFORMATION
16" Front Wheel (Special Order)	160301	Outside (Front) Polish
16" Rear Wheel (Special Order)	160302	Inside (Rear) Polish
Lug Nut 9/16"	139987	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	011911	
Closed Rear Cap	011912	

ALCOA MOD STYLE CLASSIC DUAL WHEELS

FORD F450 2005-2006
10 Hole 225 mm Bolt Circle
6.70" Center Bore



19.5" x 6" ten-hole flat face dual wheel. Designed to fit the 2005-06 F450 (2WD & 4WD) Ford truck. Uses steel inner wheel on dual. Each wheel has a capacity of 3750 pounds.

Check fit before mounting tire.

DESCRIPTION	PART NO.	OTHER INFORMATION
19.5" Front Wheel (Special Order)	763201	Outside (Front) Polish
19.5" Rear Wheel (Special Order)	763202	Inside (Rear) Polish
Front Hub Cover	QH1001F	
Rear Hub Cover	QH1001R	



ALCOA MOD STYLE CLASSIC DUAL WHEELS

FORD F450 & F550 TRUCK 2000-2004

8 Hole 225 mm Bolt Circle

6.70" Center Bore



19.5" x 6" eight-hole flat face dual wheel. Designed to fit the 2000-04 F450 and F550 Ford truck. Uses steel inner wheel on dual. Each wheel has a capacity of 3750 pounds.

Check fit before mounting tire.

Description	Part No.	Other Information
19.5" Front Wheel (Special Order)	763801	Outside (Front) Polish
19.5" Rear Wheel (Special Order)	763802	Inside (Rear) Polish
Lug Nuts		Use OEM Lug Nuts
Lug Nut Cover	PGCF896LNC	
Front Hub Cap	PGCF896FHC	
Rear Hub Cap	PGCF896RHC	

ALCOA HOT SHOT DUAL WHEELS

CHEVROLET AND GMC DUAL WHEELS 2001-2006

8 Hole 6.5" Bolt Circle

4.60" Center Bore



16" x 6.5" 8-Hole flat face dual wheel. Designed to fit 2001-06 Chevrolet/GMC 1 ton two wheel drive and four wheel drive trucks. Uses Two Piece Washered Nut. Uses steel inner wheel on dual.

Each wheel has a maximum load capacity of 2780 pounds.

235/16 tires will not work on this application.

Check fit before mounting tire.

DESCRIPTION	PART NO.	OTHER INFORMATION
16" Front Wheel	163251	Outside (Front) Polish
16" Rear Wheel	163252	Inside (Rear) Polish
Lug Nut 14mm-1.5	139698	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	003611*	
Closed Rear Cap	003612	
*Open 4WD caps not currently available		



ALCOA HOT SHOT DUAL WHEELS

DODGE DUAL WHEELS 2000-2004

Dodge Ram 3500 Trucks

Flat Face Wheel

8 Hole 6.5" Bolt Circle

4.77" Center Bore



16" x 6" 8-Hole flat face dual wheel. Designed to fit Dodge Ram 3500 2000-04 1 ton trucks. Uses Two Piece Washered Nut. Uses steel inner wheel on dual.

Each wheel has a maximum load capacity of 2780 pounds.

Check fit before mounting tire.

DESCRIPTION	PART NO.	OTHER INFORMATION
16" Front Wheel	163291	Outside (Front) Polish
16" Rear Wheel	163292	Inside (Rear) Polish
Lug Nut 9/16"	139987	Two Piece Washered Nut
Chrome Lug Nut Cover	000190	
Closed Front Cap	001611	
Closed Rear Cap	001612	

ALUMINUM CAPS FOR ALCOA SINGLE WHEELS

PARTNUMBER	DESCRIPTION
<p data-bbox="358 373 448 401">002167</p> 	<p data-bbox="586 373 760 401">Height: 5.875".</p> <p data-bbox="613 411 732 438">Long Cap.</p> <p data-bbox="553 449 792 476">5.15" Hub Diameter.</p> <p data-bbox="542 487 803 514">8 on 6-1/2" Bolt Circle.</p> <p data-bbox="548 525 797 552">Has Alcoa Medallion.</p>
<p data-bbox="358 684 448 711">003167</p> 	<p data-bbox="597 684 748 711">Height: 4.7".</p> <p data-bbox="553 722 792 749">5.15" Hub Diameter.</p> <p data-bbox="542 760 803 787">8 on 6-1/2" Bolt Circle.</p> <p data-bbox="548 798 797 825">Has Alcoa Medallion.</p>
<p data-bbox="315 1010 404 1037">008167</p> 	<p data-bbox="613 1010 764 1037">Height: 4.65"</p> <p data-bbox="574 1047 797 1075">5.15" Hub Diameter</p> <p data-bbox="558 1085 813 1113">8 on 6-1/2" Bolt Circle.</p> <p data-bbox="634 1123 753 1150">Open Cap.</p>











ALUMINUM WHEEL CAPS FOR ALCOA DUAL WHEELS

PARTNUMBER	DESCRIPTION	PARTNUMBER	DESCRIPTION
<p>001611</p> 	<p>Height: 1.125". For Dodge/Ford dual wheel applications. 8 on 6-1/2" Bolt Circle. Has Alcoa Medallion.</p>	<p>003612</p> 	<p>Height: 4.750". For Chevrolet/GMC dual wheel applications. 8 on 6-1/2" Bolt Circle. Has Alcoa Medallion.</p>
<p>001612</p> 	<p>Height: 4.75". For Dodge/Ford dual wheel applications. 8 on 6-1/2" Bolt Circle. Has Alcoa Medallion.</p>	<p>011911</p> 	<p>Height: 1.5". Fits front 10 hole wheels. 10 on 7.25" Bolt Circle. Has Alcoa Medallion.</p>
<p>001681</p> 	<p>Height: 4.75". Open Cap for Dodge/Ford dual wheel applications. 8 on 6-1/2" Bolt Circle.</p>	<p>011912</p> 	<p>Height: 5.375". Fits rear 10 hole wheels. 10 on 7.25" Bolt Circle. Has Alcoa Medallion.</p>
<p>003611</p> 	<p>Height: 1.125". For Chevrolet/GMC dual wheel applications. 8 on 6-1/2" Bolt Circle. Has Alcoa Medallion.</p>		




STEEL WHEEL CUSTOM CAPS


PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
115 	2.95" Hub Diameter Closed Cap. Used on some trailer wheels.	111 	5.14" Hub Diameter Closed Cap. Used on many 8 on 6-1/2" Bolt Circles.
100 	3.18" Hub Diameter Closed Cap. Fits some trailer 5-4 1/2" Bolt Circles.	112 	5.14" Hub Diameter Open Cap. Used on many 8 on 6-1/2" Bolt Circles.
101 	3.28" Hub Diameter Closed Cap. Fits many 5 on 4-1/2", 5 on 4-3/4" and 5 on 5" Bolt Circles.	139 	5.14" Hub Diameter Closed Long Cap. Used on Ford Rear 8 on 6-1/2" Bolt Circle.
102 	4.25" Hub Diameter Closed Cap. Fits most 5 on 5-1/2" and 6 on 5-1/2" Bolt Circles.		
104 	4.25" Hub Diameter Open Cap. Fits most 5 on 5-1/2" and 6 on 5-1/2" Bolt Circles.		




**CHROME ACORN NUTS,
STAINLESS STEEL CAPPED ACORN NUT,**



TYPE	THREADSIZE	PART NO.
CHROME ACORN NUTS	7/16" R.H.	1002
13/16" HEX	1/2" R.H.	1404
	12mm x 1.25 R.H.	1006
	12mm x 1.50 R.H.	1007
	14mm x 1.50 R.H.	1009
Special Note: Not for use on Alcoa Aluminum Wheels.		




DUPLEX CHROME	1/2" R.H.	3004
ACORN NUTS	9/16" R.H.	3010
7/8" HEX		
Special Note: Not for use on Alcoa Aluminum Wheels.		




EXTRA LONG	9/16" R.H.	3210
DUPLEX CHROME	9/16" L.H.	3220
ACORN NUTS		
7/8" HEX		
Special Note: Not for use on Alcoa Aluminum Wheels.		

ALUMINUM MAG WHEEL NUTS (SHANK TYPE)


Special Note: Not for use on Alcoa Aluminum Wheels.




TYPE	THREADSIZE	PART NO.
SHORT SHANK MAG 13/16" HEX	7/16" R.H.	5002
	1/2" R.H.	5004
	12mm x 1.25 R.H.	5006
	12mm x 1.50 R.H.	5007
	WASHER	774



STANDARD MAG 13/16" HEX	7/16" R.H.	8102
	1/2" R.H.	8104
	12mm x 1.25 R.H.	8106
	12mm x 1.50 R.H.	8107
	WASHER	772



DUPLEX MAG 7/8" HEX	1/2" R.H.	9004
	9/16" R.H.	9010
	WASHER	773



EXTRA LONG	9/16" R.H.	9210
DUPLEX MAG	9/16" L.H.	9220
7/8" HEX	WASHER	773

WASHERS


777



778

PART NO.	DESCRIPTION
774	Round Short Shank Washer
772	Round Standard Mag Washer
773	Round Duplex Washer
777	Keystone Style On Center
778	Keystone Style Off Center



CONVERSION STUDS



Many automobiles, trucks and trailers have no studs on them. They have a tapped surface and a wheel bolt that screws into the surface. This creates a problem if custom wheels are put on. In order to use custom wheel nuts, it is necessary to have a stud. By screwing these studs into the tapped surface, a threaded surface comes out on the other end. An allen wrench secures these studs in place.

PART NO.	DESCRIPTION
944	1/2"-20 R.H. TO 1/2"-20 R.H.
946	12m x 1.25 TO 12m x 1.25
947	12m x 1.50 TO 12m x 1.50
950	12" - 20 RH to 14m x 1.5



CUSTOM WHEEL PART NUMBERS AND CAPS

PART NO.	CAP
23983	N.A.
23969	N.A.
44163	N.A.
44165	N.A.
19-2410CT	115
19-3410CT	101
19-4410CT	101
19-6410CT	102
19-8486CT	111
5158060	102 Closed 104 Open
5150012	101
5158012	101 Closed
5158055	102 Closed 104 Open
KH128700	102
80-3314T	N.A.
80-3324T	115
80-4326T-E	101
80-4366	102 Closed 104 Open
80-5326T-E	101
80-5327	101
80-5347	101
80-5357	102 Closed 104 Open
80-5358	102 Closed 104 Open

PART NO.	CAP
80-5366T-E	102
80-5367	102 Closed 104 Open
80-5387	111 Closed 139 Closed Extra Long (Ford Rear) 112 Open
80-6367	102 Closed 104 Open
80-6386T-E	111
80-6387	111 Closed 139 Closed Extra Long (Ford Rear) 112 Open
81-5366CT	102
91-3412	115
91-4612-E	101
91-5512-E	101
91-5550-E	101
91-5612-E	101
91-5650-E	101
91-5660-E	102
91-7680-E	111



ALCOA CLEANING SYSTEM

Alcoa has been pushing the leading edge of aluminum technology since they invented the stuff nearly 100 years ago. That's why the Alcoa name carries more credibility with your customers than any other name in the business today. Now Alcoa scientists have formulated an exclusive new aluminum care system you will take a shine to!

The Alcoa Aluminum Care System works on all aluminum components: wheels, fuel tanks, fenders, cab protectors and more. It's as easy as 1-2-3!



PART NUMBER	SIZE	INFORMATION
CLEANER	20 oz.	Sprays on, rinses off. Removes dulling oxidation. No scrubbing to remove ordinary dirt!
POLISH	16 oz.	Restores like-new luster.
SEALANT	13 oz.	Keeps aluminum shining six times longer than unprotected aluminum.

STEEL WHEEL LOAD RATING CHART AUTOMOTIVE AND LIGHT TRUCK

Maximum Recommended Wheel Load.

For 12" Trailer Wheels or other Trailer Ratings,

See the Henderson Wheel Trailer Catalog.

SIZE	BOLT CIRCLE	LOAD RATING
13"	4 & 5 Lug	1100 lb. using 24" maximum tire diameter
14"	4 Lug	1200 lb. using 28" maximum tire diameter
14"	5 & 6 Lug	1500 lb. using 28" maximum tire diameter
15"	5 & 6 Lug	1500 lb. using 30" maximum tire diameter
16"	5, 6 & 8 Lug	2200 lb. using 33" maximum tire diameter

MAXIMUM RECOMMENDED WHEEL LOADS ARE NOT TO BE EXCEEDED REGARDLESS OF TIRE LOAD RATING.

WARNING

Misapplication of Tire/Wheel combination may reduce vehicle's stability and may cause accident and injury. Use on any vehicle of tires or wheels of sizes or types not recommended or specified by vehicle manufacturer is at the user's sole risk and voids any and all warranties expressed or implied (including merchantability and fitness for a particular purpose).

WARNING

Do not mount 16.5" diameter tires on 16" diameter wheels. Do not mount 16" diameter tires on 16.5" diameter wheels.



WARNING

**Wheel and tire servicing can be dangerous.
To protect life and limb, be sure you understand and follow all
mounting, demounting, maintenance, inspection, operational
procedures and safety instructions and practices.**

For complete information contact:

**Henderson Wheel & Warehouse Supply
1825 South 300 West
Salt Lake City, UT 84115**

or

**Henderson Wheel & Supply
112 West 34th Street
Boise, ID 83714**


Ask for the following catalog:

**"Alcoa Aluminum Truck Wheel Service Manual and Operating
Instructions"**

Never mount 16.5" diameter tires on 16" diameter wheels.

Never mount 16" diameter tires on 16.5" diameter wheels.

**Come see us at
one of our six
Henderson
Locations:**

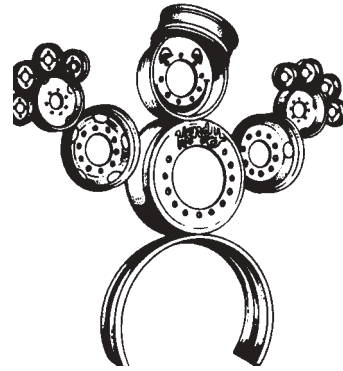

Henderson Wheel and Warehouse Supply

1825 South 300 West • Salt Lake City, UT 84115

Tel: (801)486-2073 • Toll Free: (800)748-5111 • Fax: (801)486-0353

Henderson Parts Pros

3144 Grant Avenue • Ogden, UT 84401

Tel: (801)393-0440 • Toll Free: (800)627-3956 • Fax: (801)621-0781

Henderson Parts Pros

7480 South State Street • Midvale, UT 84047

Tel: (801)566-6566 • Fax: (801)352-2535

Henderson Parts Pros

333 North State Street • Orem, UT 84057

Tel: (801)229-2333 • Toll Free: (888)586-8774 • Fax: (801)224-8612

Henderson Parts Pros

4151 West 5415 South • Kearns, UT 84118

Tel: (801) 965-1611 • Fax: (801)965-1616

Henderson Wheel & Supply

112 W. 34th Street • Boise, ID 83714

Tel: (208)344-6525 • Toll Free: (800)248-3444 • Fax: (208)336-1296